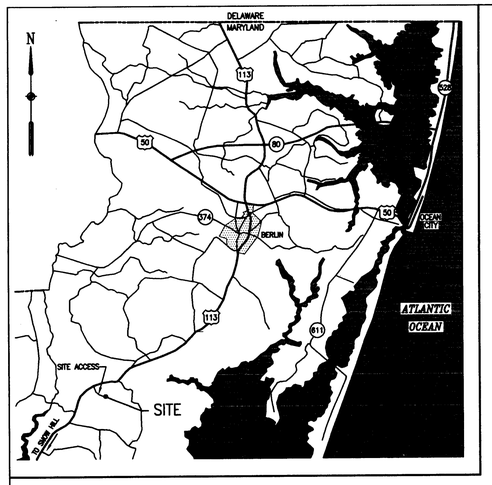

VICINITY MAP

3 1.5 0 3 6
GRAPHIC SCALE IN MILES

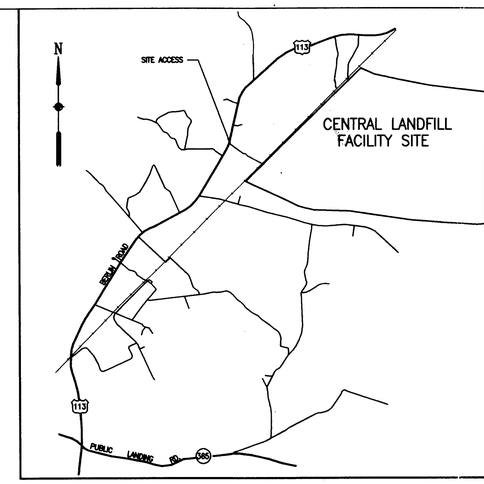

LOCATION MAP

4000 2000 0 4000 8000
GRAPHIC SCALE IN FEET

WORCESTER COUNTY
CENTRAL LANDFILL FACILITY SITE
MUNICIPAL SOLID WASTE RECOVERY FACILITY
WORCESTER COUNTY, MARYLAND

DRAWING NO.	SHEET NO.	DRAWING TITLE
G-1	1 OF 31	TITLE SHEET
C-1	2 OF 31	FACILITY PLAN
C-2	3 OF 31	SITE GRADING PLAN
C-3	4 OF 31	EROSION AND SEDIMENT CONTROL DETAILS
C-4	5 OF 31	CIVIL DETAILS
C-5	6 OF 31	STORMWATER MANAGEMENT DETAILS AND MISCELLANEOUS NOTES
C-6	7 OF 31	PIPE PROFILES
A-1	8 OF 31	TIPPING/SORTING FLOOR PLAN
A-2	9 OF 31	EAST & WEST ELEVATIONS
A-3	10 OF 31	NORTH & SOUTH ELEVATIONS
A-4	11 OF 31	ROOF PLAN
A-5	12 OF 31	FLOOR PLAN – OFFICE, MAINTENANCE AND LOCKER ROOMS
A-6	13 OF 31	LONGITUDINAL CROSS-SECTION AND DETAILS
A-7	14 OF 31	FINISH AND DOOR SCHEDULES AND DETAILS
A-8	15 OF 31	CORE SECTION AND DETAILS
A-9	16 OF 31	STAIR AND RAILING DETAILS
S-1	17 OF 31	FOUNDATION/FOOTING PLAN
S-2	18 OF 31	FOUNDATION/FOOTING DETAILS
S-3	19 OF 31	PEDESTAL DETAILS
S-4	20 OF 31	RETAINING WALL AND LOADING DOCK CROSS SECTIONS AND DETAILS
E-1	21 OF 31	ELECTRICAL SCHEDULE, LEGEND AND NOTES
E-2	22 OF 31	POWER PLAN
E-3	23 OF 31	LIGHTING PLAN
E-4	24 OF 31	RISER DIAGRAM AND PANEL SCHEDULE
M-1	25 OF 31	MECHANICAL LEGENDS AND SCHEDULES
M-2	26 OF 31	MECHANICAL PLAN
M-3	27 OF 31	MECHANICAL PART PLAN
P-1	28 OF 31	PLUMBING SPECIFICATIONS AND LEGENDS
P-2	29 OF 31	PLUMBING PLAN
P-3	30 OF 31	PART PLAN
P-4	31 OF 31	RISERS AND DETAILS

REFERENCE SYMBOLS

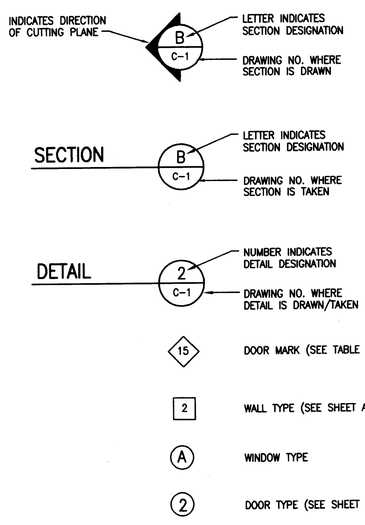

EROSION & SEDIMENT CONTROL NOTES

1. TOTAL DISTURBED AREA 20.0 +/- ACRES.
2. TOTAL EARTH CUT 20,000 CY.
3. TOTAL EARTH FILL 0 CY.

PROJECT DATA	
CONSTRUCTION TYPE:	3-B
USE GROUP:	S-1
TAX MAP NO.:	48
PARCEL NO.:	58

OWNER'S CERTIFICATION

I HEREBY CERTIFY THAT ANY CLEARING, GRADING, OR CONSTRUCTION WILL BE IN ACCORDANCE WITH THIS APPROVED PLAN.

JOHN H. TUSTIN P.E. DATE

OWNER / APPLICANT:
WORCESTER COUNTY DEPARTMENT OF PUBLIC WORKS
6113 TIMMONS ROAD
SNOW HILL, MD 21863
ATTN.: JOHN TUSTIN P.E.
PHONE: (410) 632-5623

NO.	DATE	BY	DESCRIPTION

REVISIONS

SEAL

STATE OF MARYLAND GEORGE ANTHONY KYRIAZIS No. 9311 PROFESSIONAL ENGINEER

CENTRAL LANDFILL FACILITY SITE
MUNICIPAL SOLID WASTE RECOVERY FACILITY
WORCESTER COUNTY, MARYLAND

TITLE SHEET

EA ENGINEERING, SCIENCE AND TECHNOLOGY
Loveton Center
15 Loveton Circle
Sparks, Maryland 21152
(410) 771-4950

DATE	MAY 2002
DESIGNED BY	DOK
DRAWN BY	FDV
CHECKED BY	GAT
PROJECT MANAGER	GAT
PROJECT NUMBER	10609.14
SCALE	AS SHOWN
FILE NAME	TS-1
DRAWING NUMBER	G-1
SHEET NUMBER	1 OF 31

FILE: G:\WORCNO.W\PROJECTS\10609.14\CONTRACT\COMMUNITY\TS-1.DWG 4-3-02